

SRS-100 RESIN RIBBON BY SATO

APPLICATIONS



Healthcare



Horticulture



Pharmaceutical



Chemical



Retail



Electronics



Warehouse



Metals



Industrial



Lumber

FEATURES

Low printhead energy

Abrasion resistance

Print flexibility

High density print

Anti-static printhead saver coating for printhead protection

Scratch resistance

Chemical resistance to common agents

High speed


Wide working windows

TECHNICAL INFORMATION

SRS-100

RIBBON PROPERTIES

Ink	Resin
Colour	Black
Thickness	<9.0µm
Carrier	4.5µm Polyester Film
Ink Melting Point	110°C
Optical Density (transmission)	>0.90
Optical Density (reflective)	>1.80
Maximum Print Speed	300mm/s

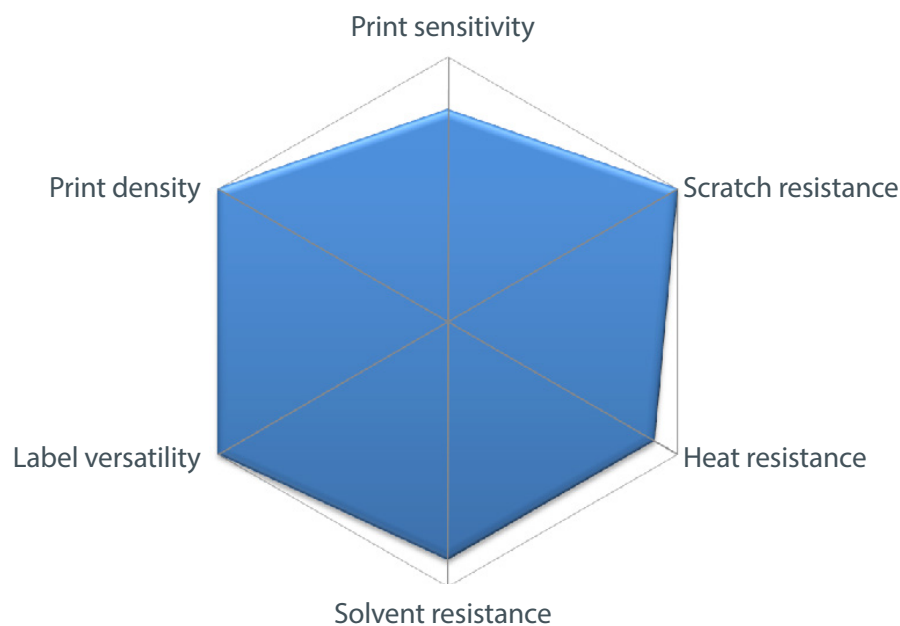

PRINTING SUBSTRATES

Papers	Coated
Synthetics	Polyester, Polyethylene, Polypropylene, PVC